




Fluid Hose & Coupling Inc.
strives to be "working partners" in contributing
to our customers needs, goals and successes.




2 locations to serve you!

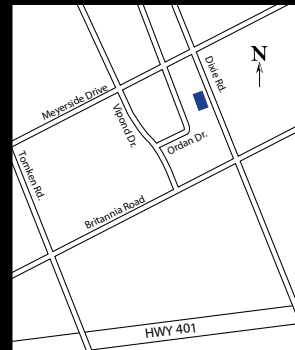

6150 Dixie Road, Unit 1
Mississauga, Ontario
Canada
L5T 2E2

905-670-0955
905-670-0995 FAX

Sales@fluidhose.com
www.fluidhose.com

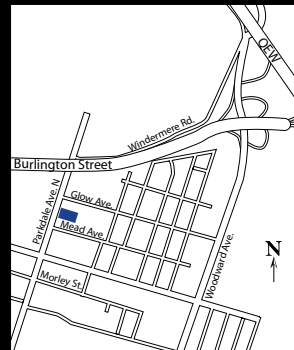

646 Parkdale Ave. North, Unit 1
Hamilton, Ontario
Canada
L8H 5Z4

905-296-7515
905-296-7512 FAX

***FluidHose &
Coupling Inc.***



***Curb Pump Couplings
& Assemblies***

ISO 9001:2000

Your Complete Hose and Coupling Supplier.

At Fluid Hose & Coupling we have the internal capabilities to assemble the hose and couplings to meet your requirements. We can produce from 1 ft assemblies for dispensing petroleum. All our assemblies are made with **Goodyear Flexsteel** hose which is UL rated. This ensures you receive a top quality product..

2 Piece Permanent Hose Assemblies

Advantages

Swivel is attached permanently versus removeable 3 piece configuration. Assembly can not be removed and re-attached like old assemblies.

Safety – re-useables may be re-installed improperly by untrained personnel, causing possible liability issues.

Added backup washer to eliminate wear to the swivel not to ensure longer assembly life than re-useable.

Anti-rotational clip groove to add to wear resistance

Cost is less. Quality is superior.

FLS-Couplings

3pc Reattachable Chrome Plated Brass Swivel

Coupling Specifications

Part No.	Hose ID	Pipe Thread	Hose OD
FLS 58	5/8	3/4	1 – 1/32
FLS 75	3/4	3/4	1 – 13/64
FLS 100	1	1	1 – 1/2



FL Couplings

Chrome Plated Brasas Couplings
Internally Swagged to Hose

Coupling Specifications

Part No.	Hose ID	Pipe Thread	Hose OD
FL 580	5/8	3/4	1 – 1/32
FL 581	5/8	3/4	1
FL 750	3/4	3/4	1 – 13/64
FL 751	3/4	3/4	1 – 11/64
FL 100	1	1	1 – 1/2
FL 101	1	1	1 – 25/64



FLR Couplings

2 piece Re-attachable Chrome Plated Brass Fittings

Coupling Specifications

Part No.	Hose ID	Pipe Thread	Hose OD
FLR 58	5/8		
FLR 75	3/4	3/4	1 – 13/64
FLR 100	1	1	1 – 1/2



FLSP Permanent Swivel Chrome Coupling

2 Piece Configuration
Internally Swagged

Coupling Specifications

Part No.	Hose ID	Pipe Thread	Hose OD
FLSP 58	5/8	5/8	1
FLSP 75	3/4	3/4	1 – 3/16
FLSP 1000	1	1	1 – 1/2

